

EK40

HYDRAULIC PILING RIG





GEAX EK40 NO COMPROMISE

HIGH PRODUCTIVITY

Thanks to an efficiently engineered hydraulics with high quality components and a powerful last generation engine, the EK40 offers superior performance relative to the size, while keeping very low running costs.

UNIQUE ARCHITECTURE

Like all Geax machines, the EK40 has a long supporting boom and a sliding mast. This allows a great variety of tool positioning for drilling like: long reach drilling, low headroom and maximized tool height for casing.

MANEUVERABILITY

With its compact architecture and a proverbial stability, the EK40 can drill in any site including slopes, uneven terrains and tight spaces. The higher maneuverability allows fast movements compared to a traditional rig.

VERSATILITY

The EK40 can easily be converted in other drilling modes with modular kits. Common set-ups are kelly drilling and CFA, but many others are possible like diaphragm walls, soil mixing, soil displacement hydraulic hammer and customized set-up.

LARGE DIAMETER PILES


Version S - fixed tracks
Version L - expandable tracks



Max pile diameter¹	mm - in	1.000 - 40
Pull down force	kN - lbf	75 - 16.860
Extraction force	kN - lbf	88 - 19.780
Mast stroke	mm - ft	1.200 - 3.9
Rotary stroke on mast	mm - ft	1.000 - 3.3
Total rotary stroke	mm - ft	2.200 - 7.2
Min working height S version²	mm - ft	4.050 - 13.3
Min working height L version²	mm - ft	4.900 - 16

NOTES: 1. Recommended
2. Without mast extensions and with a short kelly bar


S version

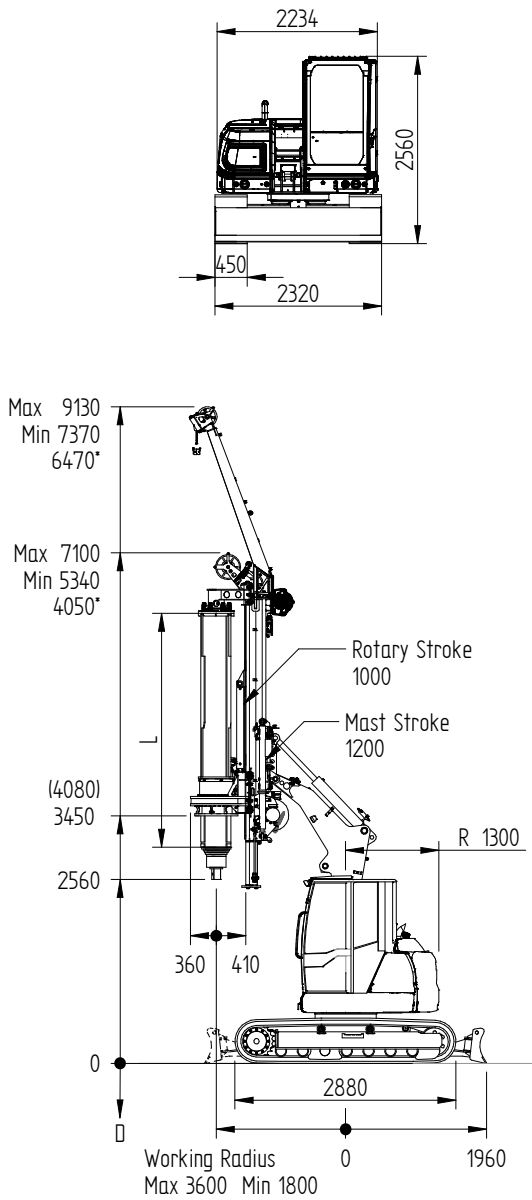

n° elements x m		Depth		H	
		S version		L version	
7 x 3.2 (standard S)	m - ft	20.5 - 67	2.56 - 8.4	3.28 - 10.8	
7 x 3.4 (standard L)	m - ft	22 - 72	-	3.08 - 10.1	
7 x 2.6	m - ft	16.5 - 54.1	3.16 - 10.3	3.88 - 12.7	
9 x 3.2	m - ft	27 - 88.5	2.56 - 8.4	3.28 - 10.8	

All kelly bars are round interlocking
Friction kelly and custom measures available upon request

L version

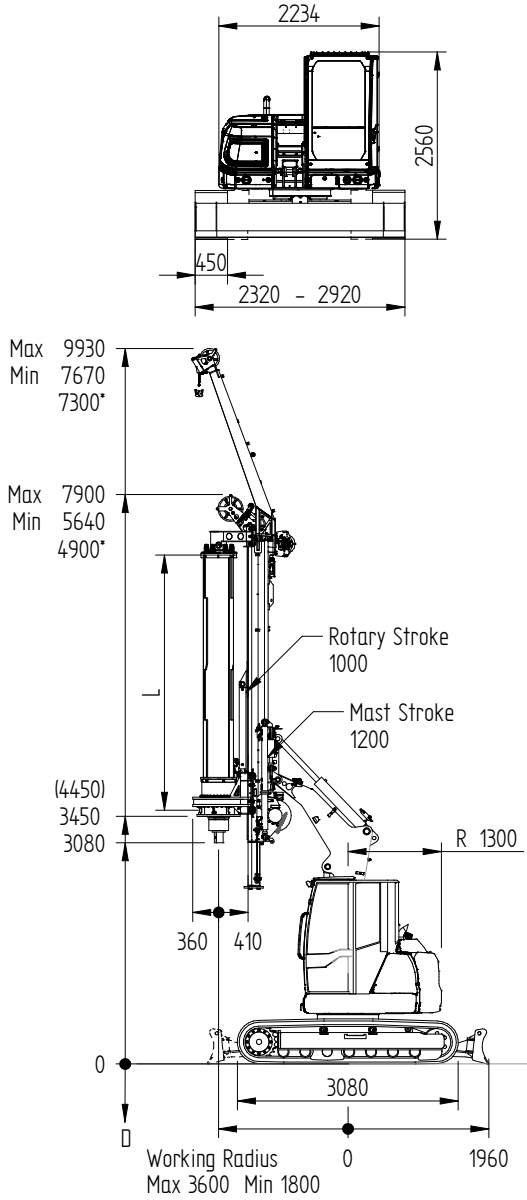

CONTINUOUS FLIGHT AUGER


Version S - fixed tracks
Version L - expandable tracks




Max pile diameter ¹	mm - in	500 - 20	
Pull down force	kN - lbf	85 - 19.100	
Extraction force	kN - lbf	150 - 33.720	
Mast stroke	mm - ft	1.200 - 3.9	
		S version	L version
Max pile depth	m - ft	11.2 - 36.7	12.5 - 41
Rotary stroke on mast	mm - ft	6.700 - 22	8.000 - 26.2
Total rotary stroke	mm - ft	7.900 - 25.9	9.200 - 30.2
Max auger length	mm - ft	7.600 - 24.9	8.900 - 29.2

NOTES: 1. Recommended

S version

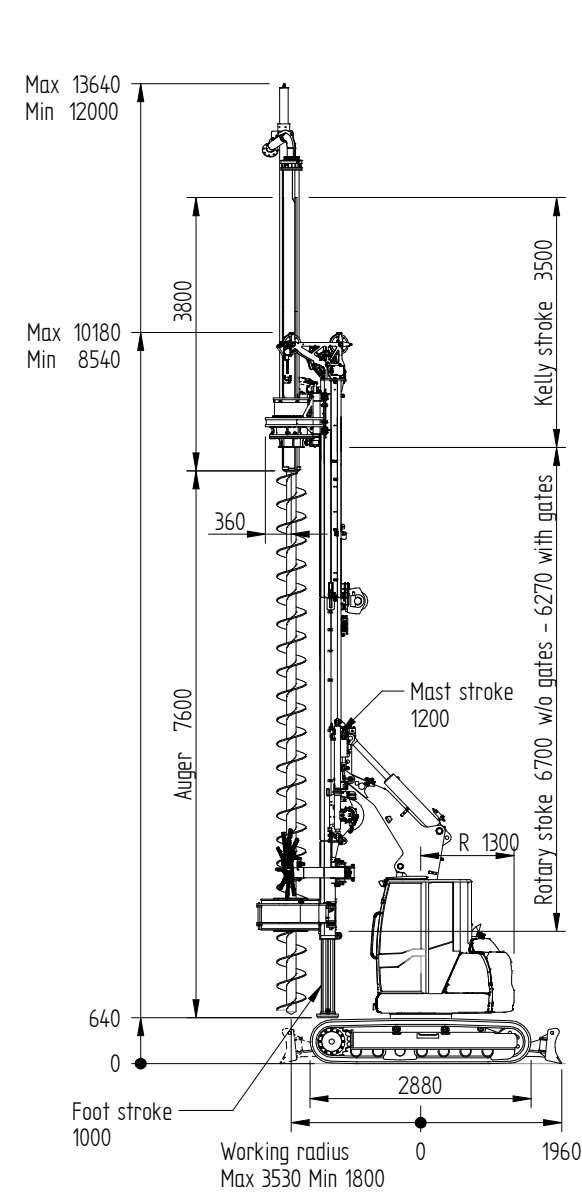

L version

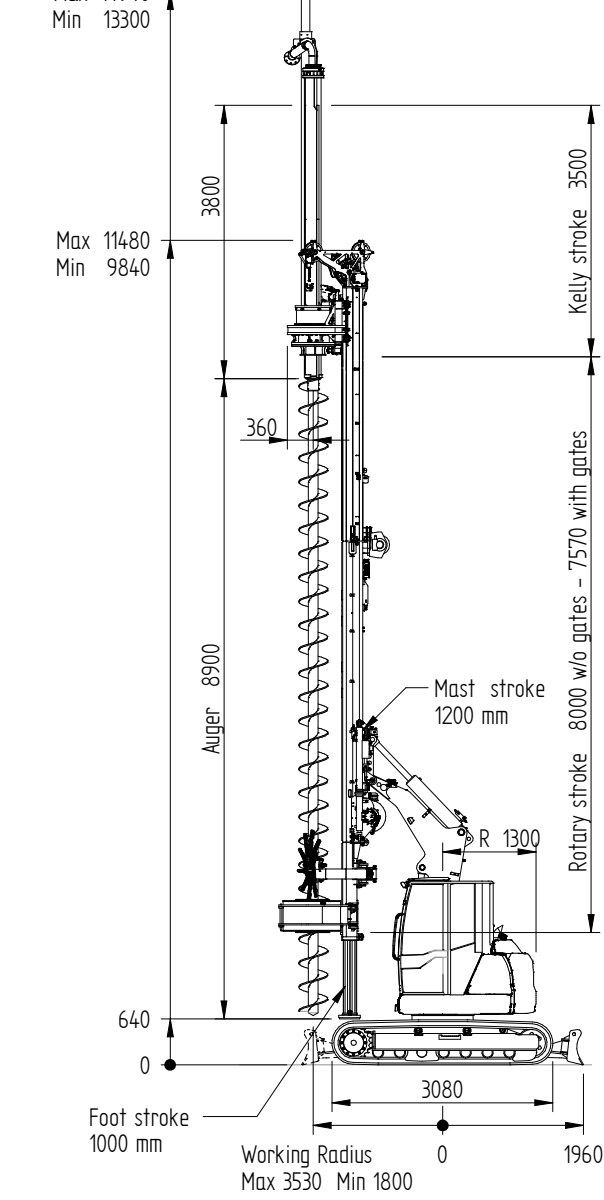

TECHNICAL DATA SHEET

BASE CARRIER

Engine	type	4TNV98
Exhaust emission	EU EPA	Stage V - III Tier4f - 3
Engine power	kW (hp)	53.7 (73) - 46.5 (63.2)
Main pumps	l/min	185
Hydraulic pressure	bar	260

MAST

Forward tilt	deg	>10
Backward tilt	deg	>10
Lateral tilt	deg	± 6
Mast vertical stroke	mm - ft	1.200 - 3.9

WINCHES

		KELLY	CFA
Main winch line pull (1st layer)	kN - lbf	58 - 13.040	58x3 - 13.040x3
Aux winch line pull (1st layer)	kN - lbf	17 - 3.820	17 - 3.820


DRILLING

		S version		L version	
		KELLY	CFA	KELLY	CFA
Max pile diameter ¹	mm - in	1.000 - 40	500 - 20	1.000 - 40	500 - 20
Std pile depth	m - ft	20.5 - 67	11.2 - 36.7	22 - 72	12.5 - 41
Max pile depth	m - ft	27 - 88.5	11.2 - 36.7	27 - 88.5	12.5 - 41
Rotary stroke on mast	mm - ft	1.000 - 3.3	6.700 - 22	1.000 - 3.3	8.000 - 26.2
Total rotary stroke	mm - ft	2.200 - 7.2	7.900 - 25.9	2.200 - 7.2	9.200 - 30.2
Min working headroom ²	mm - ft	4.050 - 13.3	5.540 - 18.2	4.900 - 16	6.340 - 20.8

TRANSPORT

		S version		L version	
		KELLY	CFA	KELLY	CFA
Length	mm - ft	7100 - 23.3	7.690 - 25.2	7.900 - 25.9	8.490 - 27.8
Width	mm - ft	2.320 - 7.6	2.320 - 7.6	2.320 - 7.6	2.320 - 7.6
Height	mm - ft	2.560 - 8.4	2.560 - 8.4	2.560 - 8.4	2.560 - 8.4
Weight	kg - lbs	12.800 - 28.220	13.000 - 28.650	14.900 - 32.850	15.100 - 33.290

KELLY

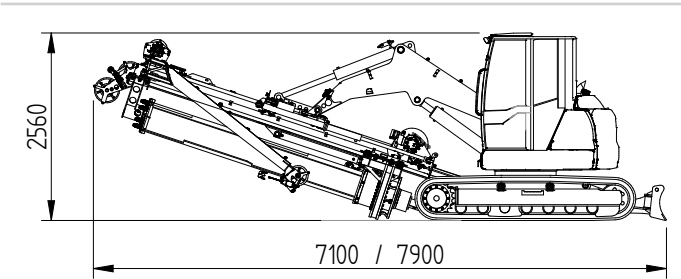

- NOTES:
1. Recommended
 2. Removing the mast extensions

UNDERCARRIAGE

		S version	L version
Tracks width	mm - ft	2.320 - 7.6	2.320/2.920 - 7.6/9.6
Tracks length	mm - ft	2.880 - 9.45	3.080 - 10.1
Track shoes	mm - ft	450 - 1.47	450 - 1.47
Tail radius	mm - ft	1.300 - 4.26	1.300 - 4.26

ROTARY HEAD




Torque (nominal)	kNm - lbf ft	34 - 25.080
Drilling speed	rpm	20 - 55
Spin-off speed	rpm	55

CROWD SYSTEM

		KELLY	CFA
Pull down force	kN - lbf	75 - 16.860	85 - 19.100
Extraction force	kN - lbf	88 - 19780	150 - 33.720

BPS Patented Crowd System

BPS is the Geax patented crowd system for CFA piling providing a mechanical locking system between the rotary head and the mast which creates a crowd force on the auger available along the entire length of the mast. The system is activated only when needed by the operator and requires no pulleys or rope

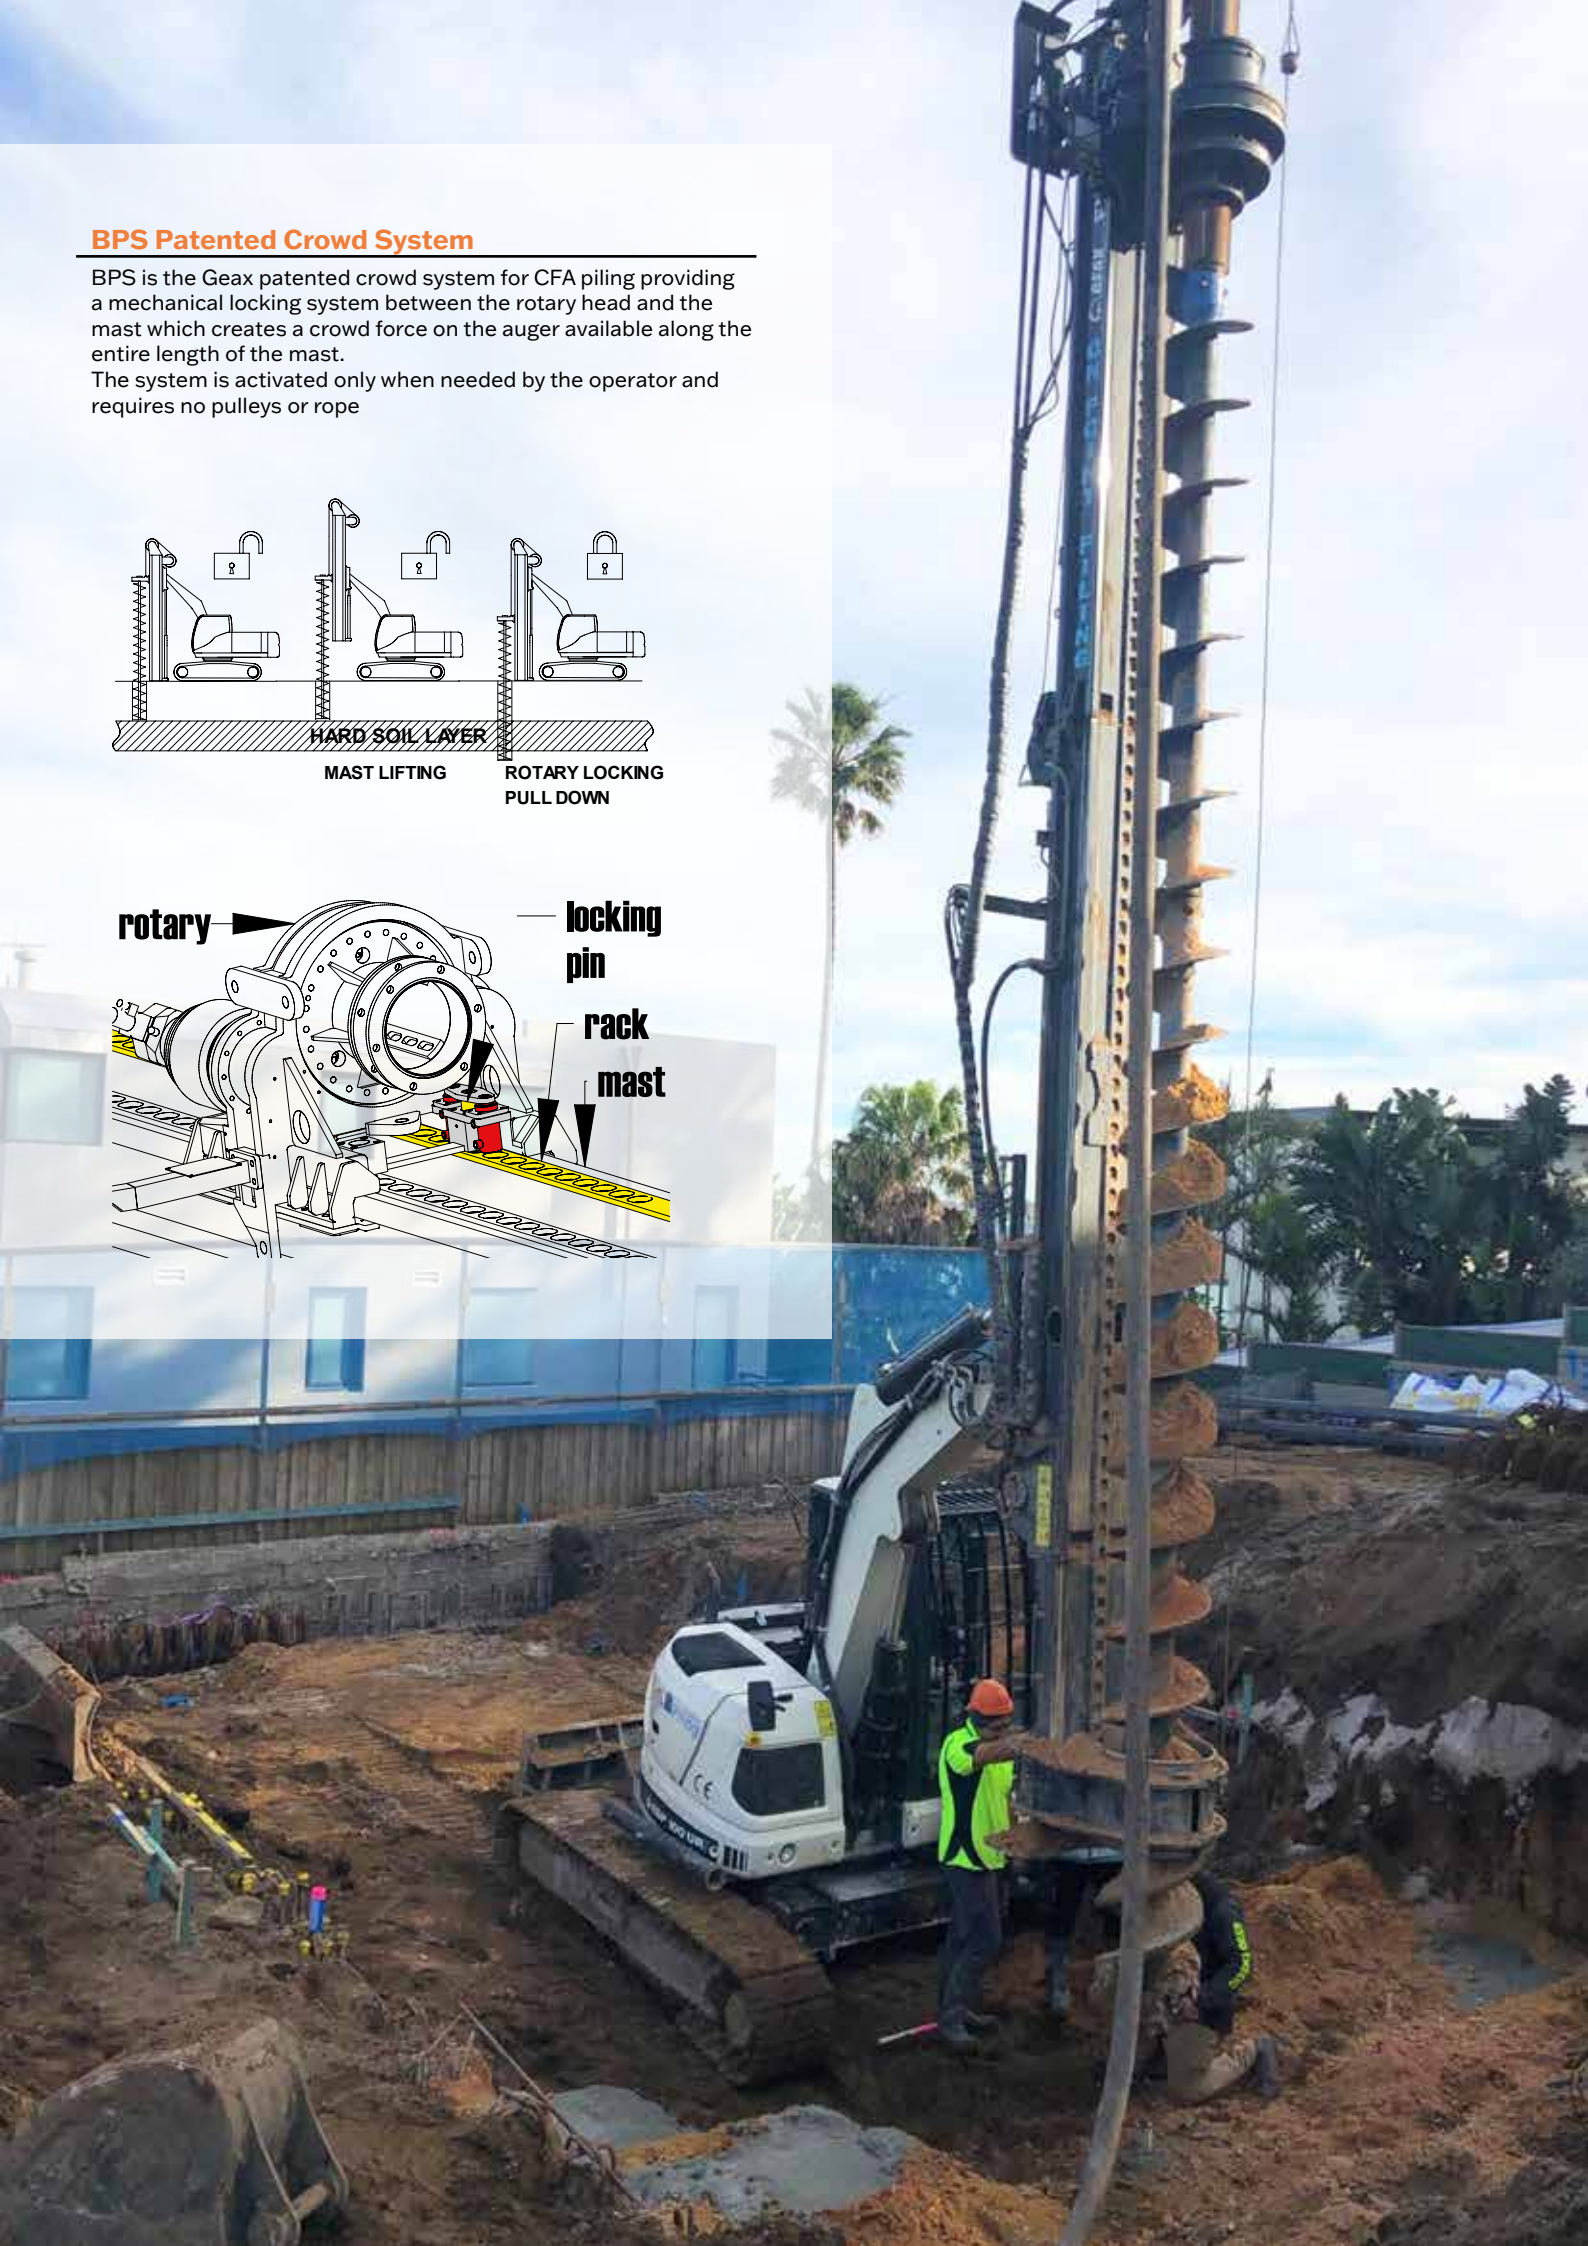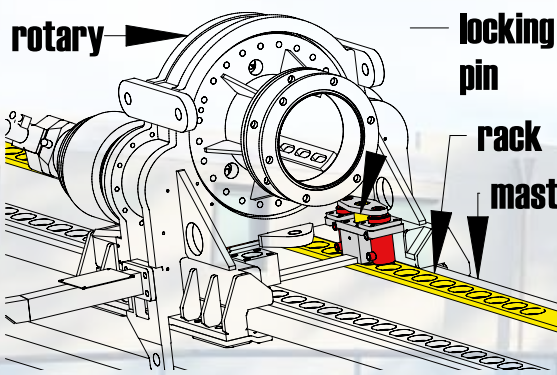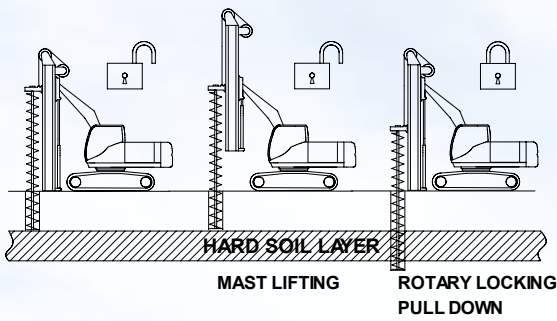

- Values are effective except where otherwise specified.
- Technical data are provided as indicative information only, they are subject to change without prior notice.



WWW.GEAX.IT
email: info@geax.it
tel: +39 0717131953

GEAX srl
Contrada Passatempo 19
Montefano (MC) ITALY