

STA

vibro and grouting
equipment

www.sta-milano.com





T3 - T6
vertical

POMPE D'INJECTION grout pump

T3 - T6 vertical

POMPE D'INJECTION grout pump

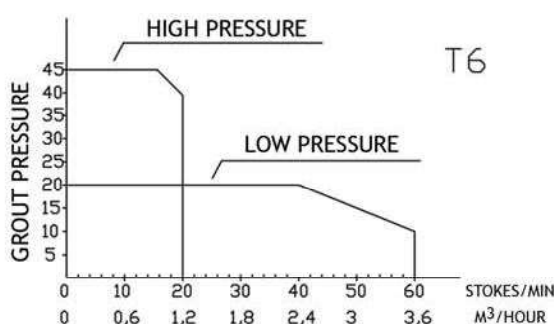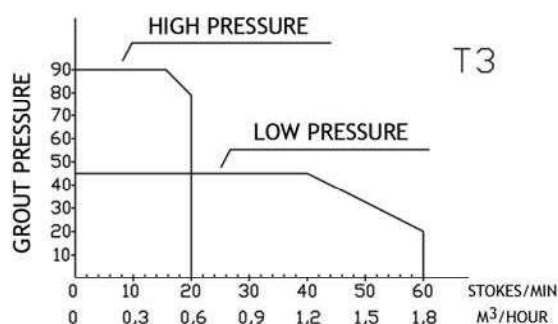

Caractéristiques techniques / Technical Features

Centrale hydraulique et injecteur / Powerpack and grouting

	T3	T6
Moteur électrique Electrical motor	4,0 kW	4,0 kW
HIGH PRESSURE CICLE		
Débit maximum d'injection Maximum grouting flow rate	0 to 12 lit/min	0 to 20 lit/min
Pression maximum d'injection Maximum grouting pressure	90 bar	45 bar
LOW PRESSURE CICLE		
débit maximum d'injection Maximum grouting flow rate	0 to 32 lit/min	0 to 60 lit/min
Pression maximum d'injection Maximum grouting pressure	45 bar	25 bar
Double gear pump double gear pump		

Dimensions et poids / Overall dimensions and weight

Poids Weight	215 kg	250 kg
Largeur / Width: Longeur / Length:	630 mm 630 mm	Hateur / Height: 1.900 mm